

@lgood



Hinges




8064CB

Butt hinge.

- Load bearing capacity to 120kg
- Concealed self-lubricating bearings
- Maintenance free
- Complete with stainless steel wood screws for timber door fixings
- Independently tested to BS EN 1935 [\[476114013\]](#)
- CE marked 1121-CPD-AC0099
- Certifire approved CF287
- Incorporated in successful fire tests and assessed to BS EN 1634-1 and BS 476 Pt 22 up to 90 minutes on timber doors and 120 minutes on metal doors
- 25 year guarantee

Finishes: SS • PS



8064RCB

As above but with 10mm radius corners.

Finishes: SS • PS




8066CB

Butt hinge.

- Load bearing capacity to 120kg
- Concealed self-lubricating bearings
- Maintenance free
- Complete with stainless steel wood screws for timber door fixings
- Independently tested to BS EN 1935 [\[476114013\]](#)
- CE marked 1121-CPD-AC0099
- Certifire approved CF287
- Incorporated in successful fire tests and assessed to BS EN 1634-1 and BS 476 Pt 22 up to 90 minutes on timber doors and 120 minutes on metal doors
- 25 year guarantee

Finishes: SS • PS



8066RCB

As above but with 10mm radius corners.

Finishes: SS • PS




8068CB

Butt hinge.

- Load bearing capacity to 120kg
- Concealed self-lubricating bearings
- Maintenance free
- Complete with M6 12MT posidrive truncated undercut stainless steel machine screws for metal door fixings
- Independently tested to BS EN 1935 [\[476114013\]](#)
- CE marked 1121-CPD-AC0099
- Certifire approved CF287
- Incorporated in successful fire tests and assessed to BS EN 1634-1 and BS 476 Pt 22 up to 90 minutes on timber doors and 120 minutes on metal doors
- 25 year guarantee

Finishes: SS • PS




8069CB

Butt hinge.

- Load bearing capacity to 200kg
- Self-lubricating bearings
- Maintenance free
- Complete with stainless steel wood screws for timber door fixings
- Independently tested to BS EN 1935 [\[477114014\]](#)
- CE marked 1121-CPD-AC0120
- Certifire approved CF287
- Incorporated in successful fire tests and assessed to BS EN 1634-1 and BS 476 Pt 22 up to 90 minutes on timber doors and 120 minutes on metal doors
- 25 year guarantee

Finishes: SS • PS



8069MT

Metal threaded screws for use with 8069CB hinge on metal doors. One pack per hinge.

Finish: XX




8080CB

Butt hinge.

- Load bearing capacity to 120kg
- Concealed self-lubricating bearings
- Maintenance free
- Complete with M6 12MT posidrive truncated undercut stainless steel machine screws for metal door fixings
- Independently tested to BS EN 1935 [\[476114013\]](#)
- CE marked 1121-CPD-AC0099
- Certifire approved CF287
- Incorporated in successful fire tests and assessed to BS EN 1634-1 and BS 476 Pt 22 up to 90 minutes on timber doors and 120 minutes on metal doors
- 25 year guarantee

Finishes: SS • PS



@ll good hardware





8025L/R

Rising butt hinge.

- STATE HAND (EG. 8025L or 8025R)
- Left hand shown
- Load bearing capacity to 60kg
- Requires regular lubrication
- Minimum door thickness: 29mm
- Only 2 butt hinges required per door

Finishes: SS • PS

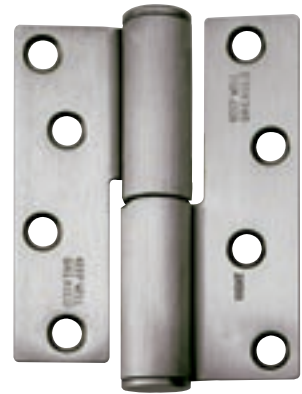



8026L/R

Falling butt hinge.

- STATE HAND (EG. 8026L or 8026R)
- Right hand shown
- Load bearing capacity to 60kg
- Requires regular lubrication
- Minimum door thickness: 29mm
- Only 2 butt hinges required per door

Finishes: SS • PS




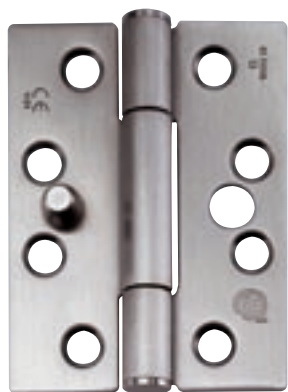


8081CB

Butt hinge.

- Complete with integral security bolt
- Load bearing capacity to 120kg
- Concealed self-lubricating bearings
- Maintenance free
- Complete with stainless steel wood screws for timber door fixings
- Independently tested to BS EN 1935 476114013
- CE marked 1121-CPD-AC0099
- Certifire approved CF287
- Incorporated in successful fire tests and assessed to BS EN 1634-1 and BS 476 Pt 22 up to 90 minutes on timber doors and 120 minutes on metal doors
- 25 year guarantee

Finishes: SS • PS

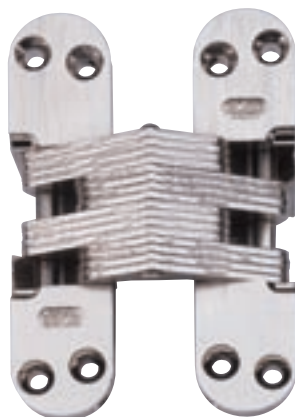


10218NP

Concealed hinge.

- Minimum door thickness: 41mm
- Incorporated in successful fire tests and assessed to BS 476 Pt 22 up to 30 minutes.

Finish: XX (Nickel plated)



8064FP

Intumescent pack for 8064CB hinges.

Finish: XX

8066FP

Intumescent for 8066CB, 8080CB and 8081CB hinge.

Finish: XX

8068FP

Intumescent for 8068CB hinges.

Finish: XX

8069FP

Intumescent for 8069CB hinges.

Finish: XX




97501

Butt hinge.

- Load bearing capacity to 120kg
- Requires regular lubrication
- Independently tested to BS EN 1935 [\[4761114013\]](#)
- CE marked 1121-CPD-AC0143
- Certifire approved CF749
- Incorporated in successful fire tests and assessed to BS EN 1634-1 and BS 476 Pt 22 up to 60 minutes on timber doors

Finishes: SS • PS



8066FP

Intumescent pack for up to 60 minute fire doors for 97501 and 97501R hinges.

Finish: XX




97501R

Butt hinge.


- Load bearing capacity to 120kg
- Requires regular lubrication
- Independently tested to BS EN 1935 [\[4761114013\]](#)
- CE marked 1121-CPD-AC0143
- Certifire approved CF749
- Incorporated in successful fire tests and assessed to BS EN 1634-1 and BS 476 Pt 22 up to 60 minutes on timber doors


Finishes: SS • PS




**97501**


Butt hinge.

- Load bearing capacity to 120kg
- Requires regular lubrication
- Independently tested to BS EN 1935

- CE marked 1121-CPD-AC0070
- Certifire approved CF369
- Incorporated in successful fire tests and assessed to BS EN 1634-1 and BS 476 Pt 22 up to 60 minutes on timber doors
- 5 year guarantee


Finishes: SS • PS**8090**


Butt hinge.

- Load bearing capacity to 40kg
- Maintenance free phosphor bronze bearing
- Independently tested to BS EN 1935,

- CE marked
- Incorporated in successful fire tests and assessed to BS EN 1634-1 and BS 476 Pt 22 up to 30 minutes on timber doors
- 10 year guarantee

Finishes: PB • BB**8095**

Concealed adjustable hinge.

- Load bearing capacity to 60kg
- Maintenance free slide bearings
- Independently tested to BS EN 1935


Finishes: SS • PS • GT • BT



overseas projects

Allgood Worldwide

297 Euston Road
London NW1 3AQ
Telephone: +44 (0)20 7255 9330
Facsimile: +44 (0)20 7383 7950
E-mail: info@allgoodww.com
Website: www.allgoodww.com

uk projects

Allgood plc

297 Euston Road
London NW1 3AQ
Telephone: 020 7387 9951
Facsimile: 020 7380 1232
E-mail: info@allgood.co.uk
Website: www.allgood.co.uk

63-83 Brearley Street
Birmingham B19 3NT
Telephone: 0121 359 4415
Facsimile: 0121 359 5832
E-mail: info@allgood.co.uk
Website: www.allgood.co.uk

28 Queen Street
Manchester M2 5HX
Telephone: 0161 834 6717
Facsimile: 0161 834 6839
E-mail: info@allgood.co.uk
Website: www.allgood.co.uk

The Wright Business Centre
1 Lonmay Road, Glasgow G33 4EL
Telephone: 0141 773 6298
Facsimile: 0141 771 9569
E-mail: info@allgood.co.uk
Website: www.allgood.co.uk